


FEATURES:

- meets with TIA/EIA-568-B.3 and ISO/IEC 11801 specifications for insertion loss
- ITU-T G.651 compliant
- provide total immunity to electrical interference
- ultra polished connectors
- low insertion loss, high return loss
- OM1 62.5/125um in white color, OM2 50/125um in orange color, OM3& OM4 in aqua
- RoHS compliant

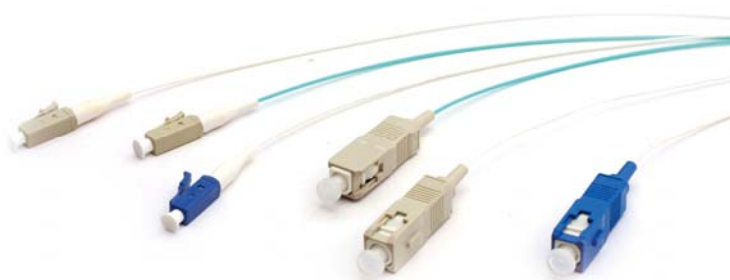

APPLICATIONS:

- Telecom network
- CATV
- FTTH
- End equipment
- Local Area Network
- Test equipment

TYPICAL PERFORMANCE:

Connector Type	ST/UPC	LC/UPC	SC/UPC	FC/UPC	MTRJ/UPC
Insertion Loss	≤0.3dB	≤0.3dB	≤0.3dB	≤0.3dB	≤0.3dB
Return Loss	≥40dB	≥40dB	≥40dB	≥40dB	≥40dB
Interchange Capability (1000 times)	<0.1dB	<0.1dB	<0.1dB	<0.1dB	<0.1dB
Impact 1.5mm drop, 8 times	<0.1dB	<0.1dB	<0.1dB	<0.1dB	<0.1dB
Working Temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

ORDERING INFORMATION:

Part No. 22x3y3010
Description: Premium Line fiber optic pigtail, MM, 900µm, UPC connector, 1m, LSOH
x, fiber mode 1: 62.5/125 um 2: 50/125 um 4: OM3 50/125 um 9: OM4 50/125 um
y, connector type 1: SC 2: ST 3: FC 4: LC

Packing

length	1m	2m	3m	--	--
	4pc with paper card in PE bag				
Qty per box	200	200	200	--	--
Box dimension	29.2*21.2*21 cm				
Qty per carton	800	800	800	--	--
Carton dimension	45*30*47 cm				

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: +49(0)8035 9836 0 ► Fax: +49(0)8035 9836 22