


**FEATURES:**

- meets with TIA/EIA-568-B.3 and ISO/IEC 11801 specifications for insertion loss
- ITU-T G.651 compliant
- provide total immunity to electrical interference
- Low insertion loss, high return loss
- RoHS compliant

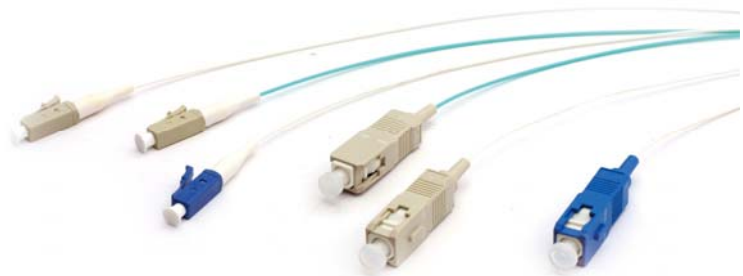

**APPLICATIONS:**

- Telecom network
- CATV
- FTTH
- End equipment
- Local Area Network
- Test equipment

**TYPICAL PERFORMANCE:**

Connector Type	ST	LC	SC	FC	MTRJ
Insertion Loss	≤0.3dB	≤0.3dB	≤0.3dB	≤0.3dB	≤0.3dB
Return Loss	≥40dB	≥40dB	≥40dB	≥40dB	≥40dB
Interchange Capability (1000 times)	<0.1dB	<0.1dB	<0.1dB	<0.1dB	<0.1dB
Impact 1.5mm drop, 8 times	<0.1dB	<0.1dB	<0.1dB	<0.1dB	<0.1dB
Working Temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C

**ORDERING INFORMATION:**

Part No. 22xyz1010  
 Description: Premium Line fiber optic pigtail, MM, 900µm, simplex, 1m  
 x, fiber mode 1: 62.5/125 um 2: 50/125 um 4: OM3 50/125 um  
 y, O.D & sheath 1: 0.9mm PVC 3: 0.9mm LSOH  
 z, connector type 1: SC 2: ST 3: FC 4: LC

Packing

length	1m	2m	3m	--	--
	4pc with paper card in PE bag				
Qty per box	200	200	200	--	--
Box dimension	29.2*21.2*21 cm				
Qty per carton	800	800	800	--	--
Carton dimension	45*30*47 cm				

**Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany**

**► TEL: +49(0)8035 9836 0 ► Fax: +49(0)8035 9836 22**