

FEATURES:


The compact water-proof design provides good impact and low temperature resistance for a wide area of applications with a variable splice capacity of 24, 48, 72 up to 96C

- comply to IEC 1073-1:1994 test requirements
- reliable mechanical sealing to prevent liquid or steam penetration
- easy to open and reopen
- 4 cable entry ports (2in, 2out) for cable diameters less than 20mm
- splice tray capacity: 24cores
- dimension: 390*210*120mm




APPLICATIONS:


- Suitable for aerial, duct and direct ground buried applications:

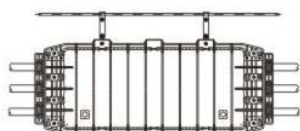

Aerial

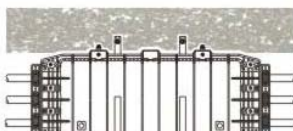

Duct

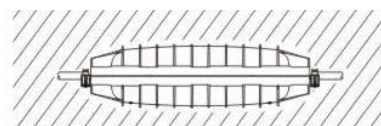

Ground buried

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

COMPONENTS:



Component	Quantity	Remarks/Application
Velcro tape	1pc	-
hoop	1set	-
nylon cable tie	24pcs	-
heat shrink tube (60mm)	24, 48, 72 or 96pcs	-
insulation tape	1roll	-
"T" spanner	1pc	-

ORDERING INFORMATION:

Part No. 5421x2402
 Description Premium Line fiber optic splice closure w/4 cable ports (2in, 2out), black
 x: splice capacity 1: 24 cores 2: 48 cores 3: 72 cores 4: 96 cores

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: +49(0)8035 9836 0 ► Fax: +49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.