

FEATURES:

The compact water-proof design provides good impact and low temperature resistance for a wide area of applications with a variable splice capacity of 24, 48, 72 up to 192

- comply to IEC 1073-1:1994 test requirements
- reliable mechanical sealing to prevent liquid or steam penetration
- easy to open and reopen
- 6 cable entry ports (3in, 3out) for cable diameters of 23mm(2), 20mm(2), 16mm(2)
- splice tray capacity: 24cores
- maximum number of splice trays: 8
- dimension: up to 96cores, 450*216*110mm; up to 192cores, 450*216*160mm




APPLICATIONS:


- Suitable for aerial, duct and direct ground buried applications:



Aerial



Duct

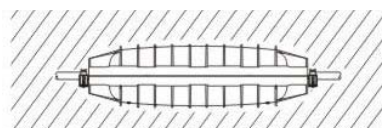

Ground buried

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

COMPONENTS:



Component	Quantity	Remarks/Application
Velcro tape	1pc	-
hoop	1set	-
nylon cable tie	24pcs	-
heat shrink tube (60mm)	24, 48, 72 or 96pcs	-
plastic dummy plug	6pcs	sealing unused cable slot
insulation tape	1roll	-
grounding wire	0.5m	-
“T” spanner	1pc	-

ORDERING INFORMATION:

Part No. 5422x2402
 Description Premium Line fiber optic splice closure w/6 cable ports (3in, 3out), black
 x: splice capacity 2: 48 cores 3: 72 cores 4: 96 cores 6: 144 cores 8: 192 cores
 Packing carton dimension:
 up to 96cores, 1pc/box, 10pcs/ carton 64.5*47*47cm G.W.38kg N.W.36kg
 up to 192cores, 1pc/box, 6pcs/carton 47*45*50.5cm G.W.24kg N.W.22.8kg

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: +49(0)8035 9836 0 ► Fax: +49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.